

ENROBING BELT FOR T20 / T35 - mm. 180 / 250 / 320




TECHNICAL CHARACTERISTICS:

- Charged belt with start/stop system
- Enrobing belt with product vibration
- Exit belt with start/stop system, supplied by paper roll
- Fast disconnected exit belt to clean enrobing belt
- Aluminium pans for product discharged
- Double veil hopper to enrobe partial/total mode
- Adjustable speed fan with inverter
- Horizontally pivoted blower with adjustable height
- Motorized tail cutter device with U-turn reversing
- Pool device for bottom and side covering product with sinks
- Height passage product mm 160
- Belt width mm. 180 (T20)/250 (T20-T35)/320 (T35)
- Adjustable speed 0-2 Mt/min.
- Belt heating lamp (optional T20)
- Plexiglass cover belt (optional T20)
- Volt 230 - Hz 50 - kw 0,50 Single-phase (special voltages on request)

Optional:

- Plexiglass cover belt
- Heating lamp belt
- Decorator 250/320 mm

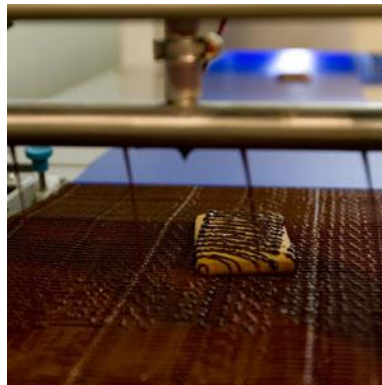

Decorator



Plexiglass cover